

HVAC/R CONDENSATE MANAGEMENT

CONDENSATE & SUBMERSIBLE PUMPS

OEM AND CUSTOM PUMPS



BeckettUS.com

75

YEARS

1948-2023
75 YEARS STRONG

1

What is the Application
or Job Type?

	CONDENSATE REMOVAL PUMPS	LOW PROFILE CONDENSATE PUMPS	MINI SPLIT CONDENSATE PUMPS	PLENUM & HIGH TEMPERATURE PUMPS	IN-PAN CONDENSATE PUMPS
Shut Off (Max Lift) Range	12.5' to 65'	20'	53'	20' to 65'	12'
Flow @ 1 ft, Range	57-476 GPH	145-153 GPH	2.7 GPH	145-476 GPH	80 GPH
Input Voltage	120V, 230V or 460V	120V or 230V	120V or 230V	120V, 230V or 460V	120V
Collection Tank Size	.68 qt. to 1 Gal. (US)	.85 qt. (US)	N/A	.85 qt. to 1 Gal. (US)	Included w/ Certain Models
Maximum Water Temp	150° to 212° F	150° to 190° F	104° F	150° to 212° F	86°F
Discharge/Check Valve	3/8" to 1/2"	3/8"	1/4"	3/8" to 1/2"	3/8"
Common Equipment and Installation Examples	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners and condensing furnaces with limited space for pump installation	Wall mounts and ductless, mini-split air conditioners	Above-ceiling and below-floor Plenum applications: condensing boiler applications	Air conditioners and refrigeration equipment where in-pan condensate removal is the only option

2

Other Considerations

Power Supply	6' Cord w/ Plug for CB12, BK17 & BK22. Hard wired terminals for larger pumps.	6' Cord w/ Plug	5' Cord (no plug)	6' Power Lead on CL20. Hard wired terminals for larger pumps.	6' Cord w/ Plug
Safety Switch	Included w/ Most Models	Included w/ Most Models	Yes	Included w/ Most Models	Included w/ Certain Models
PVC Tubing	Included w/ Certain Models	Included w/ Certain Models	Included w/ Certain Models	Included w/ Certain Models	Included w/ Certain Models
UL/CUL Listed	All Models	All Models	All Models	All Models	All Models
UL2043 - Plenum Rated	No	No	No	Yes	No
Standard Warranty	1-3 Year Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty

3

Beckett Pump Models

Featured Pumps Learn more at Beckettus.com , contact your local distributor or your local sales rep for additional information	CB12, BK17, BK22, CB22, CB25, CB50 and CP65 Pumps	CL20 Pumps	MS60 Pumps	CL20, CB50 and CP65 Pumps	IPC13 Pumps
---	---	------------	------------	------------------------------	-------------

1

Type of Condensate Removal Pump?

	MS60 MINI SPLIT CONDENSATE PUMPS	CB12 SMALL CONDENSATE PUMP	CL20 LOW PROFILE CONDENSATE PUMP	BK17 MEDIUM CONDENSATE PUMP	BK22 MEDIUM CONDENSATE PUMP
Shut Off (Max Lift) Range	53'	12.5'	20'	17'	22'
Flow @ 1 ft. Range	2.7 GPH	57 GPH	145-153 GPH	112 GPH	125 GPH
Input Voltage	120V or 230V	120V	120V or 230V	120V or 230V	120V or 230V
Collection Tank Size	N/A	0.68 qt.	.85 qt. (US)	2.5 qt.	2.5 qt.
Maximum Water Temp	104° F	150° F	150° to 190° F	150° F	150°
Discharge/Check Valve	1/4"	3/8"	3/8"	3/8"	3/8"
Common Equipment and Installation Examples	Wall mounts and ductless, mini-split air conditioners	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners, condensing furnaces, boilers, and dehumidifiers

2

Other Considerations

Power Supply	5' Cord (no plug)	6' Cord w/ Plug	6' Cord w/ Plug	6' Cord w/ Plug	6' Cord w/ Plug
Safety Switch	Yes	Included w/ Certain Models	Included w/ Certain Models	Included w/ Certain Models	Included w/ Certain Models
PVC Tubing	Included w/ Certain Models	No	No	Included w/ Certain Models	Included w/ Certain Models
UL/CUL Listed	All Models	All Models	All Models	All Models	All Models
UL2043 - Plenum Rated	No	No	Yes, w/ CL201LULP	No	No
Standard Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty	3-Year Warranty	3-Year Warranty

3

Beckett Pump Models

Featured Pumps Learn more at Beckettus.com , contact your local distributor or your local sales rep for additional information	MS601ULQ MS602ULCQ	CB121UL CB121LSUL	CL202UL, CL201LULP, CL202UL, CL202ULHT	BK171UL, BK171LSUL BK171TUL	BK221UL, BK221LSUL, BK221TUL, BK222TUL, BK222UL
---	-----------------------	----------------------	---	--------------------------------	---

1

Type of Condensate Removal Pump?	CB25 LARGE CONDENSATE PUMP	CB50 LARGE CONDENSATE PUMP	CP65 LARGE CONDENSATE PUMP	PLENUM& HIGH TEMPERATURE CONDENSATE PUMPS	IN-PAN CONDENSATE PUMPS
Shut Off(Max Lift) Range	25'	50'	65'	20' to 65'	12'
Flow @ 1 ft. Range	108 GPH	420-486 GPH	476 GPH	145-476 GPH	80 GPH
Input Voltage	120V or 230V	120V, 230V, 460V	120V, 230V or 460V	120V, 230V or 460V	120V
Collection Tank Size	1 Gal.	1 Gal.	1 Gal.	.85 qt. to 1 Gal. (US)	Included w/ Certain Models
Maximum Water Temp	150°-190° F	150° - 212° F	150° - 212° F	150° to 212° F	86°F
Discharge/Check Valve	3/8"	1/2"	1/2"	3/8"	3/8"
Common Equipment and Installation Examples	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Air conditioners, condensing furnaces, boilers, and dehumidifiers	Above-ceiling and below-floor Plenum applications: condensing boiler applications	Air conditioners and refrigeration equipment where in-pan condensate removal is the only option

2

Other Considerations

Power Supply	Hard Wired Terminal Block	Hard Wired Terminal Block	Hard Wired Terminal Block	6' Power Lead on CL20. Hard Wired Terminals for Larger Pumps.	6' Cord w/ Plug
Safety Switch	Yes, All Models	Yes, All Models	Yes, All Models	Included w/ Most Models	Included w/ Certain Models
PVC Tubing	No	No	No	Included w/ Certain Models	Included w/ Certain Models
UL/CUL Listed	All Models	All Models	All Models	All Models	All Models
UL2043 - Plenum Rated	No	Included w/ Certain Models	Included w/ Certain Models	Yes	No
Standard Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty	1-Year Warranty

3

Beckett Pump Models

Featured Pumps Learn more at BeckettUS.com , contact your local distributor or your local sales rep for additional information	CB251UL, CB251ULHT, CB252UL, CB252ULHT	CB501UL, CB501ULHTS, CB502UL, CB502ULHTS, CB504UL, CB504ULHTS	CP651ULHTS, CP654ULHTS	CL20 Pumps, CB50 Pumps, CP65 Pumps	IPC13 Pumps
--	--	---	------------------------	------------------------------------	-------------

MS60

Beckett's Mini Condensate pump is the perfect solution for Mini Split systems up to 36,000 BTU. It features a shut off of 53' along with a max suction lift of 4' which allows it to be installed in out of the way locations. It comes with a vibration/sound isolation mounting pad and semi clear condensate reservoir to easily see if maintenance is required. The reservoir features a reliable reed switch with a 4'6" power cord. No kink PVC discharge tubing (5' - 0.2" ID) is also included. Rated for water temps 41 - 104° F, 50% duty cycle.




Model #	Reservoir			Pump & Pad			Outlet	Volts	Hz	Amps	Watts	Gallons per hour @ rated voltage, 60 Hz			Suction Lift	Shut Off (Ft.)	Weight Lb. Each	Safety Switch	4'6" Cord	cULus	CE
	H	W	L	H	W	L						0'	20'	30'							
MS601ULQ	1.6"	1.5"	4.3"	2.5"	2.8"	3.4"	1/5" O.D.	120	60	0.19	16	2.7	1.7	1.1	4'	53	1.0	✓	✓	✓	
MS602ULCQ	1.6"	1.5"	4.3"	2.5"	2.8"	3.4"	1/5" O.D.	230	50/60	0.07	18/15	2.7	1.7	1.1	4'	53	1.0	✓	✓	✓	✓

* 5', 0.2" I.D. PVC tubing is included

Average Performance

IPC13A

Beckett's IPC13A is a totally submersible pump with a built-in, hermetically sealed, pressure activated switch. The pump operates automatically when the water level reaches approximately 1.6 in. and turns off at 1.3 in. Because it is a totally submersible this pump may be used in ANY application where automatic control and dependability are required. The compact size, along with high lift and quiet operation of the IPC13A are well suited for a whole range of consumer and O.E.M. requirements, including condensation removal.




Model #	H	W	L	Outlet	Volts	Amps	Watts	Gallons per hour @ 115V, 60Hz				Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	6 Ft. Cord w/plug	Clear Tubing 20' 3/8"	cULus
								1'	5'	10'	15'							
IPC13A	4.0"	3.1"	8.0"	3/8" O.D.	115	0.9	55	80	70	45	-	12	4.6		✓	✓		✓
IPC13AT	4.1"	5.0"	10.1"	3/8" O.D.	115	0.9	55	80	70	45	-	12	6.3	✓	✓	✓	✓	✓

Average Performance




Tank Capacity:
2.0 US quart (1.9 liters)

CB12



Beckett's CB12 is the ideal solution for smaller condensate removal applications where space is limited. Usable in both the standard HVAC and mini-split markets, this compact pump is uniquely designed to be quiet and can be placed inside the air conditioner, within a ceiling compartment, between studs, or wall mounted unit. Dual mounting slots on the tank allow for multi-directional placement. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

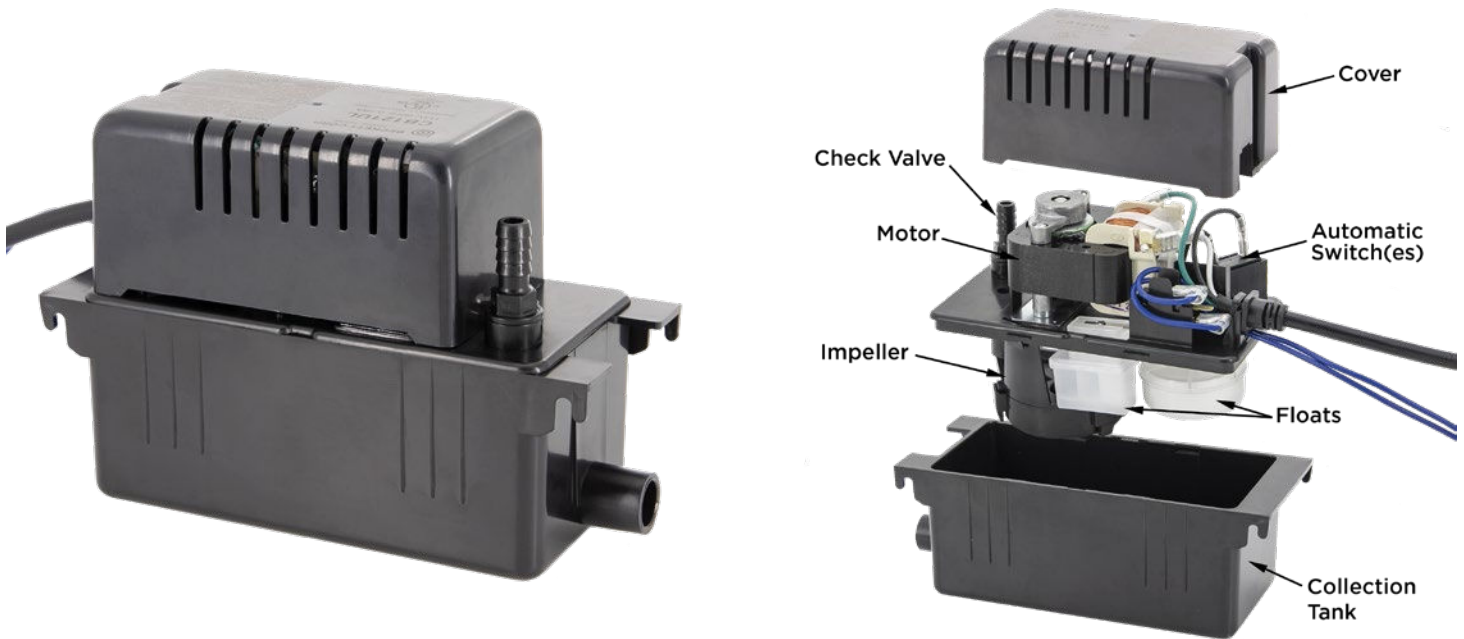

LS model does not include safety switch shown

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz/ Rated Voltage				Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	6 Ft. Cord w/plug	Hi-Eff. Gas Furn.	cUL ^{us}
									1'	5'	10'	15'							
CB121UL	5.1"	3.1"	7.5"	3/8" O.D.	3/4" O.D.	115	0.5	29	57	36	12	-	12.5	3.1	✓	✓	✓	✓	✓
CB121LSUL	5.1"	3.1"	7.5"	3/8" O.D.	3/4" O.D.	115	0.5	29	57	36	12	-	12.5	3.1		✓	✓	✓	✓

Average Performance



Tank Capacity:

CB12 0.68 US quart (0.64 liter)

Capable of handling acidic condensation from condensing furnaces and tankless water heaters

CL20

Beckett's compact CL20 has a low profile design that can be used in applications where space is limited. The shut off height for the CL20 is 20 ft. This model features high impact ABS tank and a flame retardant plastic cover. Inlets are provided on each end of the tank cover. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

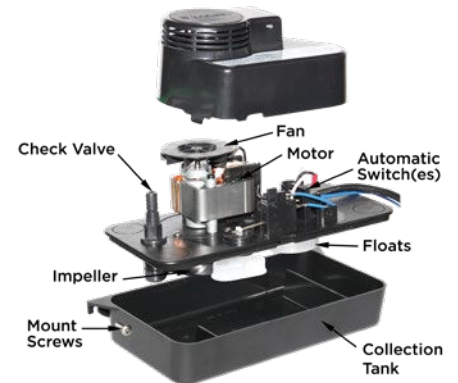

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz/ Rated Voltage					Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	6 Ft. Cord w/plug	cULus
									1'	5'	10'	15'	20'						
CL201UL	4.9"	5.0"	11.3"	3/8" O.D.	1.1"	115	2.2	100	149	110	92	49	-	20	3.7	✓	✓	✓	✓
CL202UL	4.9"	5.0"	11.3"	3/8" O.D.	1.1"	230	1.1	100	145	108	89	42	-	20	3.7	✓	✓	✓	✓
CL202ULHT	4.9"	5.0"	11.3"	3/8" O.D.	1.1"	230	1.1	100	145	108	89	42	-	20	4.0	✓	✓	✓	✓

Average Performance

Beckett Automatic Condensate Units Coding Legend:

UL- Standard Pump, 150°F Max. Water Temp.
HT- High Temperature Unit, 190°F Max. Water Temp.


Capable of handling acidic condensation from condensing furnaces and tankless water heaters

Tank Capacity:

CL20..... 0.85 US quart (0.8 liter)

Low Profile Plenum Rated

This compact low profile pump is UL tested to UL2043 for Plenum applications. Complete and compact solution for condensate removal installed in air handling and Plenum applications. Features flame retardant plastics that meet UL smoke release standards for plenum rating and capable of handling high acidity condensation from high-efficiency gas furnaces. Rated for water temperature up to 150 ° F. Inlets are provided on each end of the tank cover. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

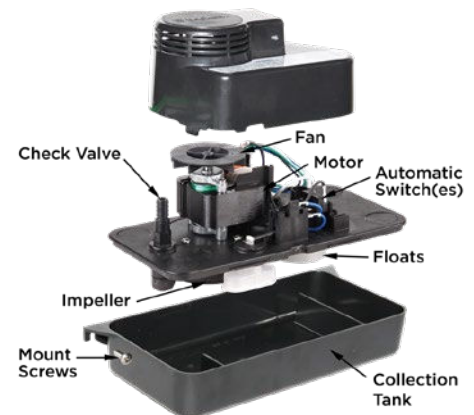

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz/ Rated Voltage					Power Leads	Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	cULus
									1'	5'	10'	15'	20'						
CL201ULP	4.9"	5.3"	11.3"	3/8" O.D.	1.1"	115	2.2	84	153	123	84	60	-	6'	20	3.7	✓	✓	✓

Average Performance

Tank Capacity: CL20 0.85 US quart (0.8 liter)


Capable of handling acidic condensation from condensing furnaces and tankless water heaters



BK17 & BK22



Beckett's family of medium condensate pumps is designed to meet or exceed your toughest job demands, including high-efficiency gas furnaces. This updated design is engineered for longer life and quiet operation. It includes easy-to-install features like multi slot metal wall hanging brackets to retro-fit other popular brands, bullseye level on lid and a twist-lock check valve requiring no tools. After installation the lift-to-test tab is an easy way to check pump operation without removing the motor cover or adding water to the tank to activate the float. Rated for condensate water up to 150° F. Automatic start/stop operation with thermally protected motor. Larger 2.5 quart tank means more water pumped out per cycle so the pump runs less and lasts longer. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

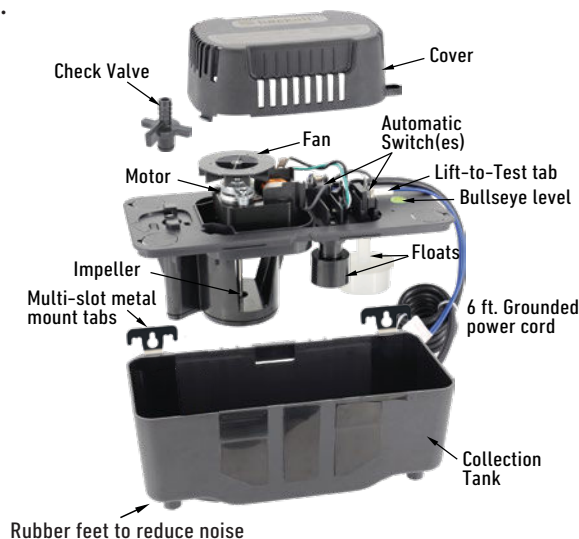

LS model does not include safety switch shown

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz/ Rated Voltage				Shut Off (Ft.)	Weight Lb. Each	Tubing	Safety Switch	Check Valve	6 Ft. Cord w/plug	cULus
									1'	5'	10'	15'							
BK171UL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.1	60	112	103	64	19	17	3.7		✓	✓	✓	✓
BK171LSUL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.1	60	112	103	64	19	17	3.6			✓	✓	✓
BK171TUL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.1	60	112	103	64	19	17	4.8	20' PVC	✓	✓	✓	✓
BK221UL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.2	65	125	72	83	50	22	3.7		✓	✓	✓	✓
BK221LSUL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.2	65	125	72	83	50	22	3.6			✓	✓	✓
BK221TUL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	115	1.2	65	125	72	83	50	22	4.8	20' PVC	✓	✓	✓	✓
BK222TUL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	230	0.9	77	156	118	103	68	22	5.4	20' PVC	✓	✓	✓	✓
BK222UL	6.6"	5.2"	11.5"	3/8" O.D.	4 x 1.1"	230	0.9	77	156	118	103	68	22	4.3		✓	✓	✓	✓

Beckett Automatic Condensate Units Coding Legend:

1- 115V 2- 230V

T- Tubing Included (20 ft. of 3/8 in. I.D.)

LS- Less Safety Switch

UL- Standard Unit 150°F Max. Water Temp.

Capable of handling acidic condensation from condensing furnaces and tankless water heaters

Tank Capacity:

BK17, BK22 2.5 US quart (2.4 liters)

Average Performance

BK17 & BK22

 **US** U.S. and Canada UL Listed

FEATURES & BENEFITS

3/8" Barb check valve
Service w/o removing hose
No tools needed

Stainless Steel Mounting Tabs
Versatile multi-slot design
Easily fits other major brands

Lift-to-Test tab
Quickly test/run pump
Easily drain tank for servicing



New 3-Year Warranty
Proven reliability
Backed with confidence

Bullseye Level on Lid
Confirm pump placement is level
Quick and easy installation


6 ft. Grounded power cord
Safe & easy power connection

*** No tools required**


Larger 2.5 Qt. Tank
Pump runs less often
Pump lasts longer

Rubber Feet on Tank
Absorbs vibration
Quieter operation


LS model does not include safety switch shown

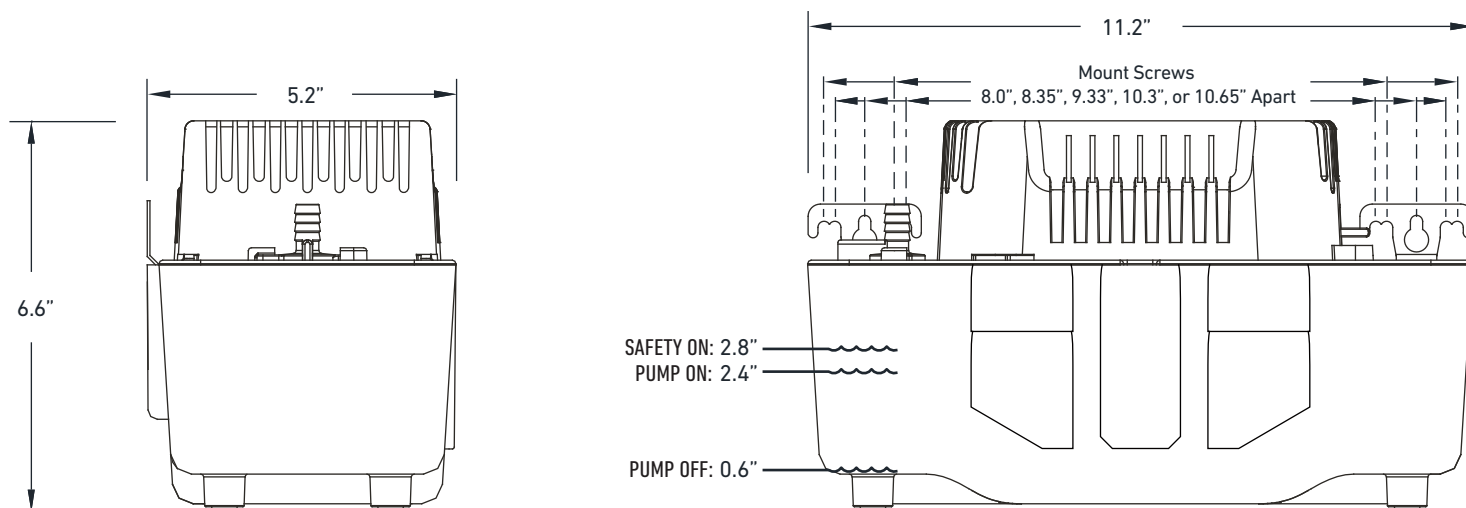

CB25



Beckett's family of large condensate pumps is ideal for higher volume condensate removal applications. Each pump operates quietly, efficiently and offers such features as a built-in safety switch and a one gallon tank. Power connection is hard wired with an UL rated terminal block. All pumps are UL/CUL listed. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

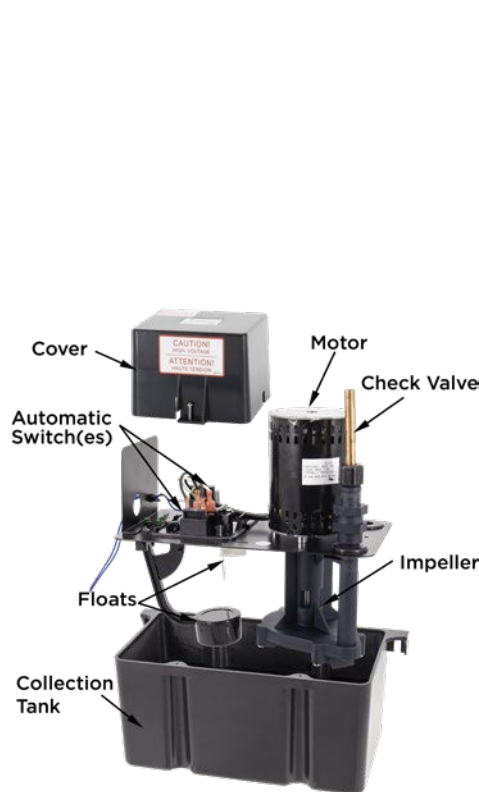

CB25 Series



CB25 High Temp Series

Model #	H	W	L	Outlet O.D.	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz / Rated Voltage				Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	cULus
									1'	5'	10'	20'					
CB251UL	10.0"	5.9"	12.0"	3/8"	1.1"	115	1.3	106	108	100	84	40	25	7.1	✓	✓	✓
CB251ULHT	10.0"	5.9"	12.0"	3/8"	1.1"	115	1.3	106	108	100	84	40	25	7.8	✓	✓	✓
CB252UL	10.0"	5.9"	12.0"	3/8"	1.1"	230	0.9	125	108	100	84	40	25	7.0	✓	✓	✓
CB252ULHT	10.0"	5.9"	12.0"	3/8"	1.1"	230	0.9	125	108	100	84	40	25	7.8	✓	✓	✓

Average Performance

Beckett Automatic Condensate Units Coding Legend:

1- 115V 2- 230V

HT- High Temperature Unit 190°F Max. Water Temp.

Capable of handling acidic condensation from condensing furnaces and tankless water heaters


Tank Capacity:

CB25 1 US gallon (3.785 liters)


CB50



Beckett's heavy-duty pump series is capable of handling all your industrial applications. Its robust design promotes a more efficient, quieter operation while maintaining product durability. Ideal solution for high lift installations up to 50' lift. The pump comes with a built-in safety switch, a one gallon tank, replaceable check valve and a pre-wired terminal block. Available in 115V, 230V and 460V models. HTS (High temp) models can handle condensate temperatures up to 212°F. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

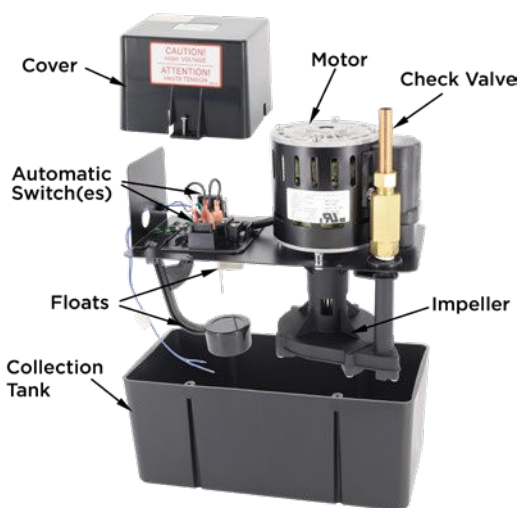

CB50 Series

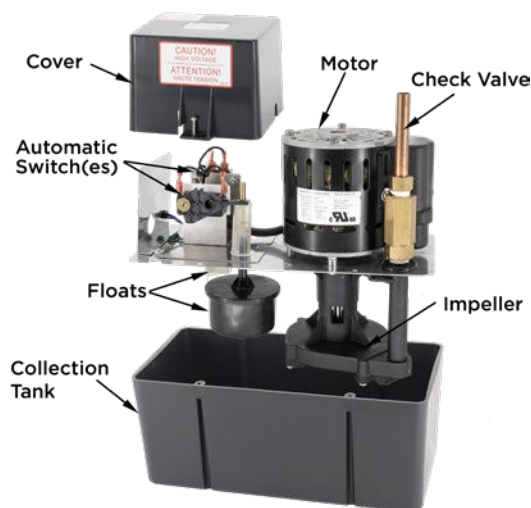

CB50 High Temp Series

Model #	H	W	L	Outlet O.D.	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz / Rated Voltage							Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	cULus
									1'	5'	10'	15'	20'	30'	40'					
CB501UL	10.0"	5.9"	12.0"	1/2"	1.25"	115	4.0	300	476	441	396	351	306	216	126	50	11.6	✓	✓	✓
CB501ULHTS	10.0"	5.9"	12.0"	1/2"	1.25"	115	4.0	300	476	441	396	351	306	216	126	50	12.3	✓	✓	✓
CB502UL	10.0"	5.9"	12.0"	1/2"	1.25"	230	1.9	350	486	453	412	372	337	249	168	50	11.7	✓	✓	✓
CB502ULHTS	10.0"	5.9"	12.0"	1/2"	1.25"	230	1.9	350	486	453	412	372	337	249	168	50	12.4	✓	✓	✓
CB504UL	10.0"	5.9"	12.0"	1/2"	1.25"	460	0.8	350	420	380	355	330	310	240	145	50	12.2	✓	✓	✓
CB504ULHTS	10.0"	5.9"	12.0"	1/2"	1.25"	460	0.8	350	420	380	355	330	310	240	145	50	13.0	✓	✓	✓

Average Performance

Beckett Automatic Condensate Units Coding Legend:

1- 115V 2- 230V 4- 460V


HTS- High Temperature Unit 212°F Max. Water Temp.

Capable of handling acidic condensation from condensing furnaces and tankless water heaters


Tank Capacity:

CB50 1 US gallon (3.785 liters)

CP65



Beckett's heavy-duty pump series is capable of handling all your high lift industrial applications. It features our most powerful motor that maintains our proven durability. Ideal solution for high lift installations up to 65' lift. Rated for condensate applications with water temperature up to 212° F. Reliable two float design. Hard wired terminal block for professional installation. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

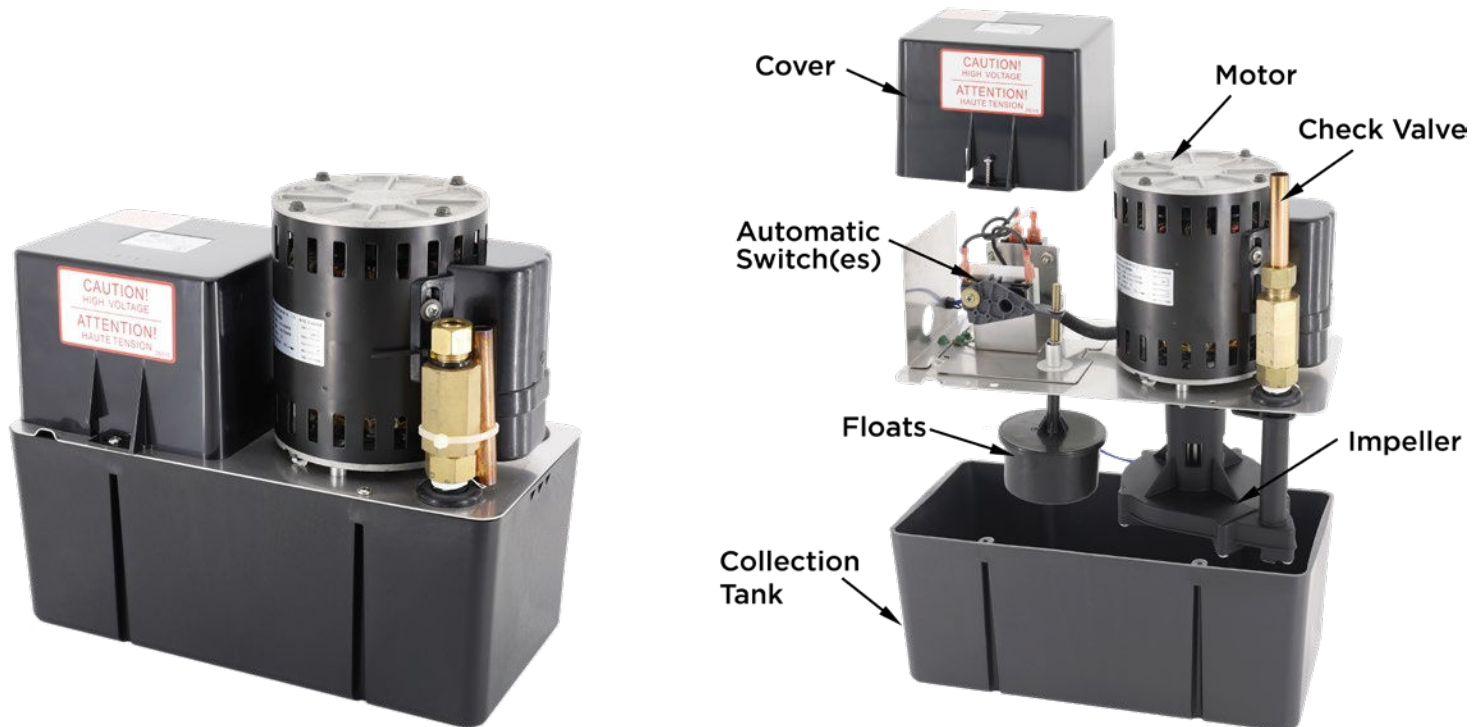

Model #	H	W	L	Outlet O.D.	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz / Rated Voltage						Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	cULus
									1'	10'	20'	30'	40'	50'					
CP651ULHTS	10.5"	5.9"	12.0"	1/2"	1.25"	115	3.3	375	476	430	380	330	270	200	65	13.9	✓	✓	✓
CP654ULHTS	10.5"	5.9"	12.0"	1/2"	1.25"	460	0.9	390	476	430	380	330	270	200	65	15.0	✓	✓	✓

Average Performance

Beckett Automatic Condensate Units Coding Legend:

1- 115V 4- 460V

HTS- High Temperature Unit 212°F Max. Water Temp.

Tank Capacity:


CP65 1 US gallon (3.785 liters)

Capable of handling acidic condensation from condensing furnaces and tankless water heaters


Plenum Rated-CL20, CB50 & CP65




Beckett's series of plenum rated pumps is UL tested to UL2043 for Plenum applications. Complete solution for condensate removal installed in air handling and Plenum applications. Features flame retardant plastics that meet UL smoke release standards. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

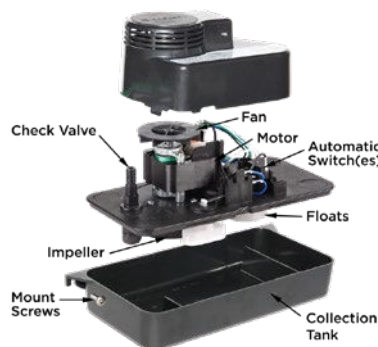


CL20 Series

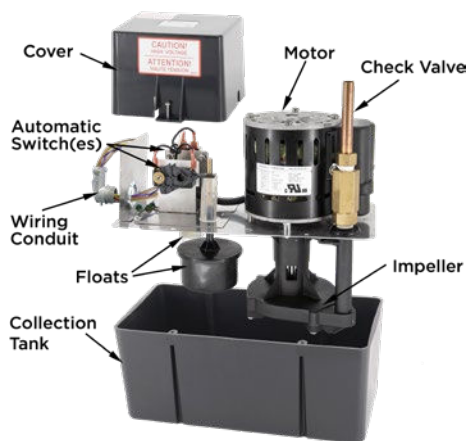

CB50 Series

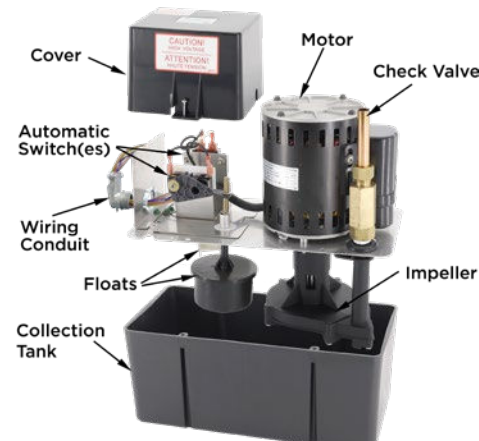

CP65 Series

Model #	H	W	L	Outlet O.D.	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz / Rated Voltage						Power Leads	Shut Off (Ft.)	Weight Lb. Each	Safety Switch	Check Valve	
									1'	10'	20'	30'	40'	50'						
CL201ULP	4.9"	5.3"	11.3"	3/8"	1.1"	115	2.2	84	153	84	-	-	-	-	6'	20	3.7	✓	✓	✓
CB501ULHTSP	10.9"	5.9"	12.0"	1/2"	1.25"	115	4.0	300	476	396	306	216	126	-	14'	50	13.3	✓	✓	✓
CB502ULHTSP	10.9"	5.9"	12.0"	1/2"	1.25"	230	1.9	350	486	412	337	249	168	-	14'	50	13.4	✓	✓	✓
CB504ULHTSP	10.9"	5.9"	12.0"	1/2"	1.25"	460	0.8	350	420	355	310	240	145	-	14'	50	14.0	✓	✓	✓
CP651ULHTSP	10.5"	5.9"	12.0"	1/2"	1.25"	115	3.3	375	476	430	380	330	270	200	14'	65	14.9	✓	✓	✓
CP654ULHTSP	10.5"	5.9"	12.0"	1/2"	1.25"	460	0.9	390	476	430	380	330	270	200	14'	65	16.0	✓	✓	✓

Average Performance

Beckett Automatic Condensate Units Coding Legend:

1- 115V 2- 230V 4- 460V

HTS-P- Plenum High Temperature Unit 212°F Max. Water Temp.

Tank Capacity:

CL20..... 0.85 US quart (0.8 liter)

CB50 1 US gallon (3.785 liters)

CP65 1 US gallon (3.785 liters)

Capable of handling acidic condensation from condensing furnaces and tankless water heaters

Condensate Evaporator Pan



Designed For Commercial Refrigeration

Specifications:

- Auto on/off float switch
- Corrosion resistant 24 & 22-gauge stainless steel construction
- 5.5-quarts Pan capacity
- 3 ft Power cord
- Thermal safety switch
- Power on LED indicator light
- Warranty-One Year from purchase

Model	L	W	H	Volts	WATTS	Amps	DISSIPATION RATE	WEIGHT	CRAUS
CEV500	12.8"	10.4"	7.1"	120V	500	4.0	3.5 GALLONS/DAY	3.8 LBS	✓



Condensate Pan Treatment 200 Tablets

Untreated Condensate pans can create scale build-up, offensive odors, clogged drains & water damage from pan overflow.

The use of Beckett Condensate Pan Treatment tabs will help to lower maintenance & service costs brought on by heavy build-up in the condensate pan.

Specifications:

- Helps keep drain pans and drain pipe clean and clear
- Eliminate foul water odors
- Biodegradable, non-corrosive long lasting formula
- 2 tabs per ton of A/C unit

CT200





Safety Control Switch




Specifications:




- Single pole, double throw, single break snap action switches
- Silver contacts
- Safe for either AC or DC (low voltage) applications
- Terminals on switches suitable for 0.020 in. x 0.187 in. female spade connection to your wiring harness if desired.

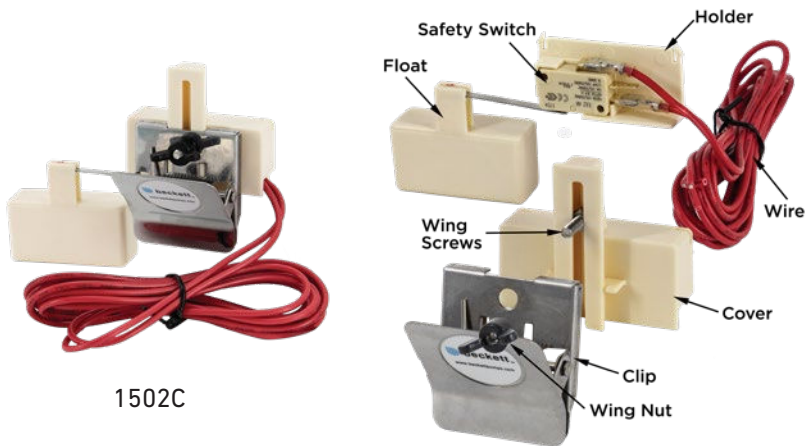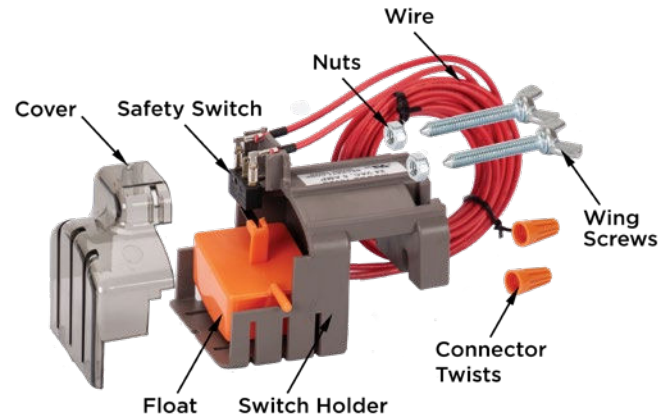


1502C

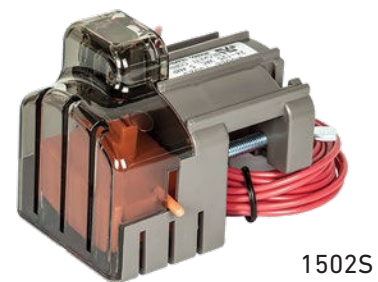

1502S




1502UR

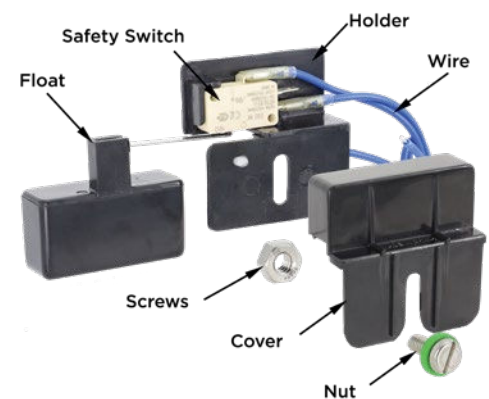

Model #	Volts	Amps	HP	Wired	Activation	Wire Length	Weight Lb. Each	Drain pan type		cULus
								Plastic	Metal	
1502C	125-250	10	1/4	Normally Closed	Opens Circuit	72"	0.3		✓	✓
1502UR	125-250	10	1/4	Normally Closed	Opens Circuit	17"	0.2		✓	✓
1502S	24	5	1/4	Normally Closed	Opens Circuit	2 leads-72", connect to thermostat	0.4	✓	✓	✓

G & GR Pumps 115V 60Hz



Beckett's submersible pump line offers top of the line epoxy encapsulated (not oil filled) 115V, 60Hz design to meet all your continuous duty requirements. They are low maintenance, environmentally safe, and can be used in a variety of industrial applications. Each pump features a heavy-duty motor for maximum output and reliability. GR models have a rotating discharge and a flow control valve for maximum flexibility.



Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 115V, 60Hz						Shut off (Ft.)	Weight (lbs Ea.)	6 Ft. Cord w/plug	cULus
									1'	2'	4'	6'	8'	10'				
G210A	3.8"	3.5"	4.5"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	115	0.5	25	210	190	137	71	-	-	7.1	2.6	✓	✓
G325A	3.8"	4.0"	5.0"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	115	0.8	50	340	325	310	265	205	135	12.2	3.5	✓	✓
G535A	4.0"	4.0"	5.4"	1/2" MNPT, 3/4" I.D. HOSE	SCREEN	115	1.2	75	550	520	450	390	295	210	13.0	4.1	✓	✓
GR210A	3.9"	3.8"	4.5"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	115	0.5	25	190	172	118	58	-	-	6.8	2.6	✓	✓
GR325A	3.9"	3.9"	5.2"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	115	0.8	50	287	253	234	183	151	120	11.4	3.6	✓	✓
G600A	4.0"	4.0"	5.4"	1/2" MNPT, 3/4" I.D. HOSE	SCREEN	115	1.2	75	590	530	470	380	295	220	12.2	4.1	✓	✓

Average Performance

DESIGNED FOR SUBMERSIBLE USE ONLY


G Pumps 230V 50/60Hz



Beckett's submersible pump line offers top of the line epoxy encapsulated (not oil filled) 230V, 50/60Hz design to meet all your continuous duty requirements. They are low maintenance, environmentally safe, and can be used in a variety of industrial applications. Each pump features a heavy-duty motor for maximum output and reliability.



G210C, G325C, G535C

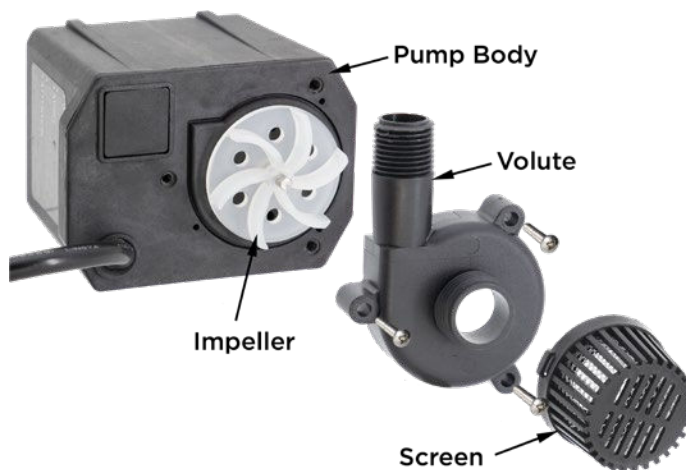

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 230V, 60Hz						Shut off (Ft.)	Weight Lb. Each	6 Ft. Cord (no plug)	CE
									1'	2'	4'	6'	8'	10'				
G210C	3.8"	3.5"	4.5"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	230	0.4	33	220	190	150	89	-	-	7.1	2.4	✓	✓
G325C	3.8"	4.0"	5.0"	1/4" MNPT, 1/2" I.D. HOSE	SCREEN	230	0.5	55	315	290	280	235	180	110	11.6	3.4	✓	✓
G535C	4.0"	4.0"	5.4"	1/2" MNPT, 3/4" I.D. HOSE	SCREEN	230	0.7	75	585	545	500	425	340	250	13.2	4.2	✓	✓

DESIGNED FOR SUBMERSIBLE USE ONLY

Average Performance

G325A6



Bottom Intake Direct Drive Pump

Beckett's unique bottom intake G325A6 pump handles continuous duty low water applications with ease. It features our proven direct drive design that is not oil filled along with a low maintenance high torque motor.

This model is ideal for a variety of Industrial applications.



Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour					Shut off (ft.)	Weight Lb. Each	6 Ft. Cord w/plug	cULus
									1'	2'	4'	6'	8'				
G325A6	4.0"	4.3"	4.8"	1/2" MNPT	Screen, Bottom	115	0.8	50	425	405	342	276	192	11.1	3.8	✓	✓


Average Performance

GP Pumps

Parts Washer Pump

GP210V is ideal for most solvent or aqueous parts washer solutions up to 210GPH @ 1 ft. with a shut off height of 7 ft. This model has a FKM shaft seal and a 1/2" MNPT conduit fitting for mounting in a parts washer.

GP325VH is ideal for most solvent or aqueous parts washer solutions up to 340GPH @ 1 ft. with a shut off height of 12 ft. This model has a FKM shaft seal and a threaded cord exit for mounting in a parts washer.

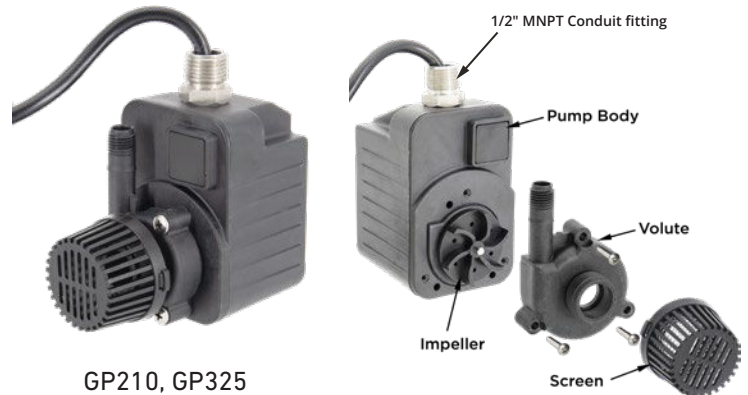

GP210, GP325

Model #	H	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz / Rated Voltage						Shut off (ft.)	Temp Rating (F)	Weight Lb. Each	6 Ft. Cord (No plug)	cULus	CE
									1'	2'	4'	6'	8'	10'						
GP210V	3.9"	2.8"	4.5"	1/4" MNPT	SCREEN	115	0.6	32	210	190	137	71	-	-	7.0	110	2.8	✓	✓	
GP210C	3.9"	2.8"	4.5"	1/4" MNPT	SCREEN	230	0.4	39	190	157	93	-	-	-	5.0	110	2.8	✓		✓
GP325VH	4.3"	2.8"	5.2"	1/4" MNPT	SCREEN	115	0.8	50	340	330	300	260	205	135	12.0	110	4.0	✓	✓	
GP325C	4.3"	2.8"	5.2"	1/4" MNPT	SCREEN	230	0.5	53	270	260	225	165	120	-	8.5	110	4.0	✓		✓

Average Performance

BRPAP1

Universal Ice Machine Replacement Pump

Beckett's ice machine replacement pump meets or exceeds the rigid specifications of original equipment manufacturers. This pump is driven by a thermally protected motor that features dual bearings and a stainless steel shaft. Our BRPAP1 is an all purpose replacement pump that features a dual voltage motor, 5 discharge adapters and 4 impellers – a must-have for every service truck. This pump can be used in the majority of commercial ice makers, such as: Crystal Tips, Ice-O-Matic, Scotsman, Manitowoc, Ross Temp, Carrier, and York.


Model #	HP*	Volts	Discharge O.D.	GPH @ 2 Ft.	RPM	Weight Lbs. Each
BRPAP1	1/30	115/230	1/2" Min.- 1" Max.	246-729*	3,000	4.3

*HP for Motor only

*Depends on Impeller/discharge combination
Average Performance




**UNIT COMES WITH 4 DIFFERENT IMPELLERS
AND 5 DIFFERENT DISCHARGE SIZES.**

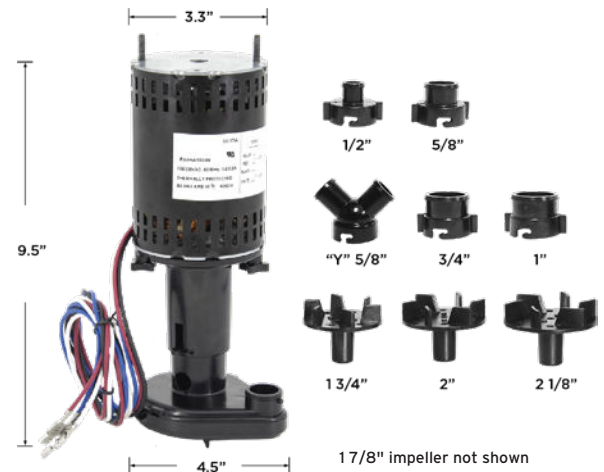

Check Valve Replacements

RP50 is the replaceable check valve for CB25's and CB50's. The unique basket design imparts much quieter operation in noise sensitive areas. All brass construction with copper adapters for 3/8 in. and 1/2 in. I.D. tubing.

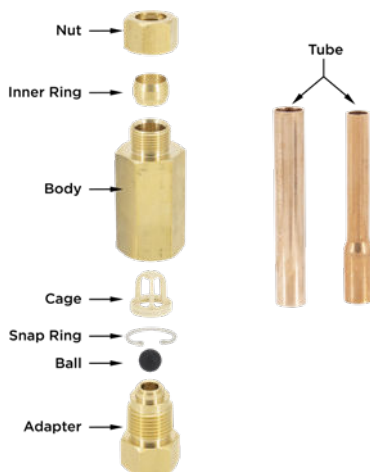

CRP1722 is the replaceable check valve kit for: BK17, and BK22. A modern duck-bill design with barbs for 3/8 in. I.D. tubing.

CRP1520A is the replaceable check valve kit for: CB15, CB20 and CL20. A modern duck-bill design with barbs for 3/8 in. I.D. tubing and 1/4 in. MNPT threads.





beckett®

Driven by Innovation Since 1948.

For user manuals, warranty information and other technical resources,
please visit www.BeckettUS.com



BeckettUS.com