

CL201ULP


LOW PROFILE PLENUM RATED CONDENSATE PUMP

115V, 20 Foot Max Lift

This compact low profile pump is UL tested to UL2043 for Plenum applications. Complete and compact solution for condensate removal installed in air handling and Plenum applications. Features flame retardant plastics that meet UL smoke release standards for plenum rating. Rated for water temperature up to 150° F. Inlets are provided on each end of the tank cover. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

INCLUDES:

- Pump is rated 115V, 60 Hz, 100 Watts
- 20 ft. max lift
- Low Profile Design, Plenum Rated
- UL Tested to UL 2043 for Plenum Applications
- Pump is rated for water temperatures up to 150° F

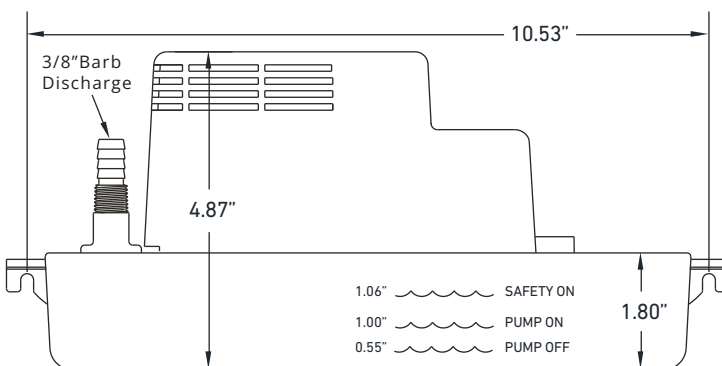

L	W	H	Outlet	Inlet	Volts/Hz	Amps	Flow (GPH) @				Max Lift	Wt.
							1'	5'	10'	15'		
11.3"	5.0"	4.9"	3/8" OD	1.1"	115/60	2.2	149	110	92	49	20'	4.3 lbs