


CL20 LOW PROFILE CONDENSATE PUMP 115V/230V, 20 Foot Max Lift

Beckett's compact CL20 has a low profile design that can be used in applications where space is limited. The shut-off height for the CL20 is 20 ft. This model features a high impact ABS tank and a flame retardant plastic cover. Inlets are provided on each end of the tank cover. This unit is capable of handling acidic condensation from condensing furnaces and tankless water heaters.

INCLUDES:

- Pump is rated 115V/230V, 60 Hz, 100 Watts
- 20 ft. max lift
- Low Profile Design
- Pump is rated for water temperatures up to 150° F

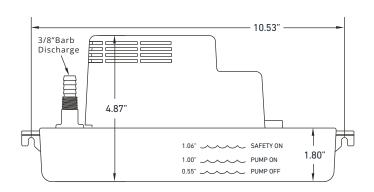





Average Performance

Model #	н	W	L	Outlet	Inlet	Volts	Amps	Watts	Gallons per hour @ 60Hz/ Rated Voltage					Shut Off LI	Weight	Safety	Check	6 Ft. Cord	cUL us
									1′	5′	10′	15′	20′	Sharon	Lb. Each	Switch	Valve	w/plug	
CL201UL	4 7/8"	5"	11 1/4"	3/8" O.D.	1.1″	115	2.2	100	149	110	92	49	-	20'	3.7	\checkmark	\checkmark	\checkmark	\checkmark
CL202UL	4 7/8"	5"	11 1/4"	3/8" O.D.	1.1″	230	1.1	100	145	108	89	42	-	20'	3.7	√	\checkmark	\checkmark	\checkmark
CL202ULHT	4 7/8"	5"	11 1/4"	3/8" O.D.	1.1″	230	1.1	100	145	108	89	42	-	20'	4.0	V	\checkmark	\checkmark	\checkmark

Beckett Automatic Condensate Units Coding Legend:

UL- Standard Pump, 150°F Max. Water Temp.

HT- High Temperature Unit, 190°F Max. Water Temp.



Tank Capacity:

CL20 0.85 US quart (0.8 liter)

BeckettUS.com | Tel: 888-232-5388

© 2023 Beckett Corporation. All Rights Reserved. Version 2022-10-21