

Item# 7201410

Model# FR680

Average Performance



7.4 FT (2.3 M)
SHUT OFF / APAGADO

5 FT (1.5 M)
263 GPH (996 LPH)

3 FT (0.9 M)
435 GPH (1647 LPH)

1 FT (0.3 M)
600 GPH (1665 LPH)

0 FT (0 M)
680 GPH (2574 LPH)

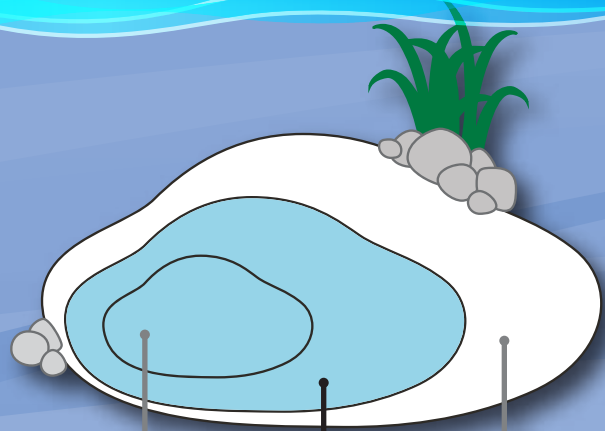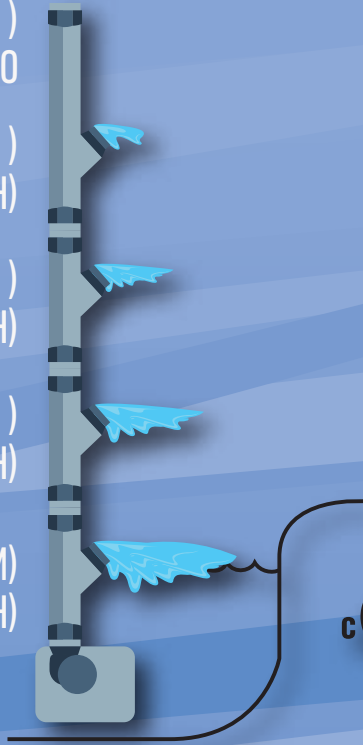

7201310

7201410

7201510

For medium ponds up to 10 ft. x 6 ft or up to 1360 gallons.

Comparison Chart

Item Artículo	Model Modelo	Flow Rate at 0 Lift Tasa de Flujo en elevación 0	Maximum Flow Flujo Máximo	Wattage Potencia	Cord Length Longitud del cable	Max Head Height Altura máxima de la cabeza
7201310	FR400/ FR500	500 GPH	440 GPH at 1 foot 355 GPH at 2 feet 270 GPH at 3 feet 192 GPH at 4 feet 105 GPH at 5 feet 0 GPH at 6 feet	38.4 Watts	15ft	6ft
7201410	FR600/ FR680	680 GPH	600 GPH at 1 foot 515 GPH at 2 feet 435 GPH at 3 feet 350 GPH at 4 feet 263 GPH at 5 feet 175 GPH at 6 feet 0 GPH at 7.4 feet	40.8 Watts	15ft	7.4ft
7201510	FR800/ FR900	900 GPH	810 GPH at 1 foot 750 GPH at 2 feet 680 GPH at 3 feet 610 GPH at 4 feet 538 GPH at 5 feet 475 GPH at 6 feet 0 GPH at 12 feet	84 Watts	15ft	12ft